


Product Datasheet

SSM10R

Membrane Material	PVDF + Braided PET
Membrane Fiber OD	$2.0 \pm 0.1\text{mm}$
Membrane Fiber ID	$0.9 \pm 0.05\text{mm}$
Effective Membrane Area	10m^2
Operational Pressure	10 - 50KPa
Operational Temperature	5 - 45°C
Operational pH	2 - 10
Design Flux (Municipal Sewage)	140 - 170L/H
Design Flux (Industrial Effluent)	110 - 140L/H

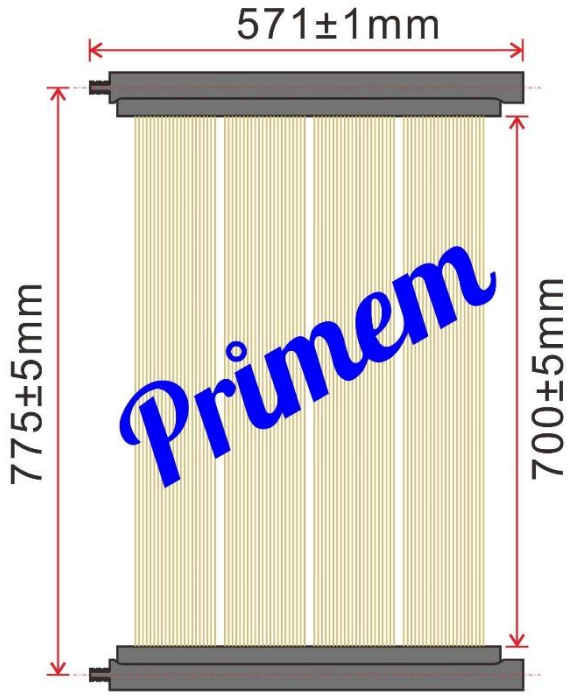

Schematic Drawing



Photo