


Product Datasheet

DSM20H

Membrane Material	PVDF
Membrane Fiber OD	$1.3 \pm 0.1\text{mm}$
Membrane Fiber ID	$0.7 \pm 0.05\text{mm}$
Effective Membrane Area	20m^2
Operational Pressure	10 - 50KPa
Operational Temperature	5 - 45°C
Operational pH	2 - 10
Design Flux (Municipal Sewage)	260 - 320L/H
Design Flux (Industrial Effluent)	200 - 260L/H

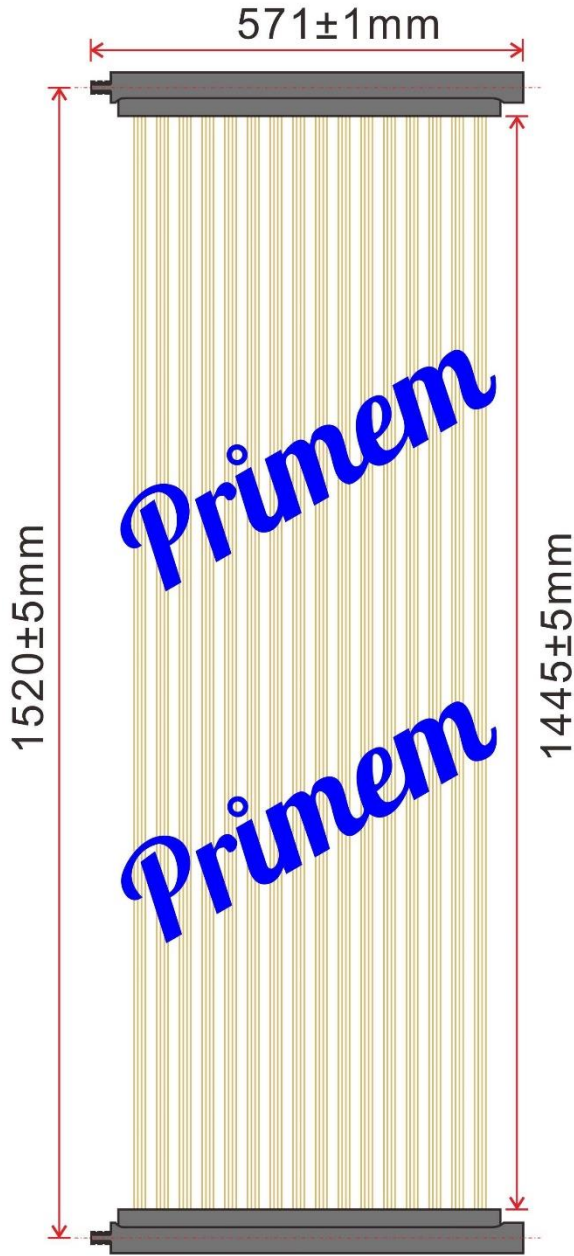

Schematic Drawing



Photo