


Product Datasheet

DSM20R

Membrane Material	PVDF + Braided PET
Membrane Fiber OD	$2.0 \pm 0.1\text{mm}$
Membrane Fiber ID	$0.9 \pm 0.05\text{mm}$
Effective Membrane Area	20m^2
Operational Pressure	10 - 50KPa
Operational Temperature	5 - 45°C
Operational pH	2 - 10
Design Flux (Municipal Sewage)	280 - 340L/H
Design Flux (Industrial Effluent)	220 - 280L/H

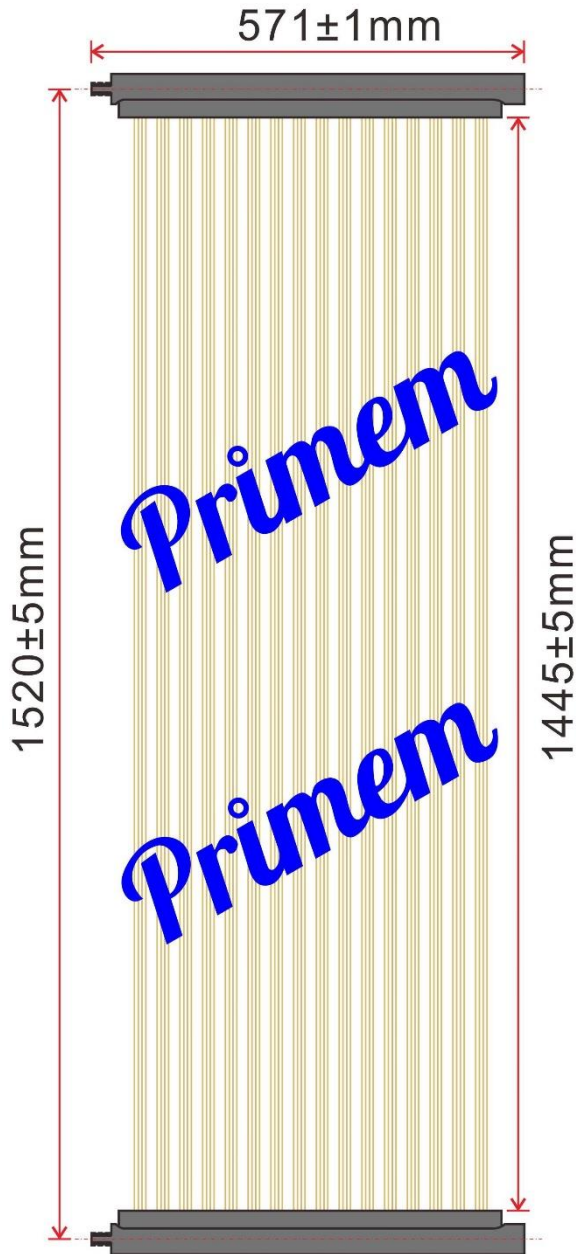

Schematic Drawing



Photo